






PP BOTTLE 5000 ml

ART. NO. 260825

GENERAL

-  KEOFITT has the widest selection of spare parts and accessories to complete your sampling system.
-  Bottles and closures are included in parts & accessories - contact KEOFIT for further details.
-  Autoclavable.
Recommended autoclave cycle is 121°C, 15 psig (1 bar) for 20 minutes. For best results, use a slow exhaust cycle.
-  When autoclaving, the bottle cannot be sealed. Remember to loosen or remove the closure.

FEATURES

-  Closure included (#260428)

CERTIFICATION*

· FDA CFR 21 §177.1520 · USP Class VI

TECHNICAL DATA

Material (process contact)

Material (without process contact)

- Closure Polypropylene (PP)
- Gasket Thermoplastic elastomer (TPE)

- Bottle Polypropylene copolymer (PPCO)
- Temperature range -20° - +121°C / -4° - +249.8° F
- Pressure Sampling should be at zero pressure

- Microwaveability Marginal

- Sterilization:
 - Autoclaving Yes
 - EtO gas Yes
 - Dry heat No
 - Radiation No
 - Disinfectants Yes



- Chemical Resistance:
 - Not recommended for Aromatic ketones - Ethers - Aromatic/Halogenated Hydrocarbons

Net Weight

- kg/lbs 0.727 kg/1.602 lbs

Spareparts

- 260428 CLOSURE f/PP BOTTLE 4000/5000 ml
- 260427 10 PACK GASKET f/CLOSURE f/PP BOTTLE 4000/5000 ml

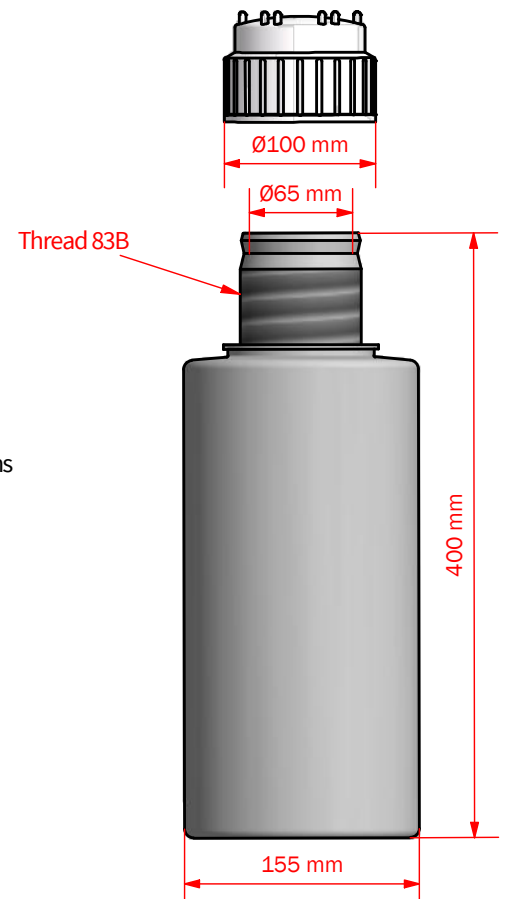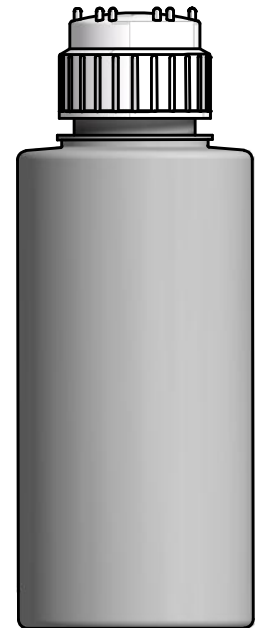

*For further information and download please visit www.keofitt.dk