






# VALVE HEAD W9 TYPE B

ART. NO. 600047

## GENERAL

-  The KEOFIT CLASSIC W9 Sampling Valve is the original and leading sterilizable sampling valve in the world. Used in all industries for decades. More than 320 standard valve configurations. Unique serial no. for each valve\*.
-  The sampling valve can be used for any process sampling for microbiological, chemical and/or physical analysis.
-  **Cleaning/sterilizing:** Between batches: Valve in open position: Cleanable by means of CIP using the detergent solution suitable for the actual process media. Between samples: Valve in its normal closed position: cleanable by CIP as "Between batches" or the valve may be sterilized by means of steam SIP or chemical SIP using a procedure appropriate to the actual circumstances. For further advice, please contact Keofitt.  
Not recommended for autoclave due to plastic parts.
-  Designed for sampling of liquids with a viscosity of up to approx. 1.000 cP containing no particles larger than Ø3 mm. Sampling of more viscous liquids is possible, only will it take longer (depending on process pressure).



## FEATURES

-  Installation: Threaded socket connection M22x1.5
-  Operation: Turn knob - no spring (opens counterclockwise)
-  Membrane: Silicone (#600051)

## CERTIFICATION\*

- EU EC 1935/2004 · EU EC 2023/2006 · DK No. 1248 10/2018 · 3-A Certificate · ATEX 2014/34/EU
- PED 2014/68/EU · FDA CFR 21 §177.2600 · USP Class VI · Keofitt DoC

## TECHNICAL DATA

### Material (process contact)

- Membrane SILICONE, GREY (#600051)

### Material (without process contact)

- Steel parts AISI 303 (1.4305) / AISI 316L (1.4404)
- Knob PA6 (Black)

### Membrane

- Article SILICONE, GREY (#600051)
- Certification\* · EU EC 1935/2004 · EU EC 2023/2006 · DK No. 1248 10/2018 · FDA CFR 21 §177.2600 · USP Class VI · REACH · RoHS · ADI Free · Keofitt DoC

### Pressure & Temperature



- Pressure 0 - 12 bar / 0 - 174 psi
- Temperature 1 - 130°C / 34 - 266°F
- Air supply -

### Net Weight

- kg/lbs





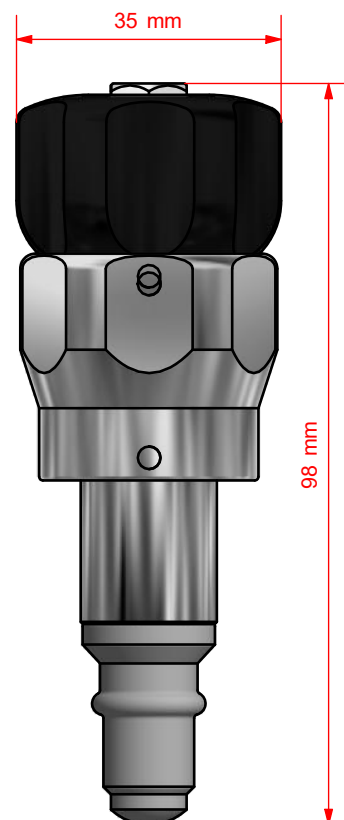











### Spareparts

- 776041 PARTS FOR W9 HEAD 600041/42/43/47



























\*For further information and download please visit [www.keofitt.dk](http://www.keofitt.dk)

# KEOFITT CLASSIC W9 SAMPLING VALVE - BODIES

W9 BODIES		WELDING BODIES					
		TANK WELDING Ø28	PIPE WELDING 1"	PIPE WELDING NW25	IN-LINE VERTICAL	IN-LINE HORIZONTAL	
HOSE PIECE		850001		850011			850028*
1/2" TRI-CLAMP		850006		850010			850027*
THREAD M16X1,5		850015		850016			850018
1/2" WELDING ENDS		850007		850019			850019

\* ON REQUEST ONLY!



CONNECTION BODIES					
VARIANT Ø50	VARIANT Ø68	MINI CLAMP	CLAMP 1" & 1½"	CLAMP 2"	CLAMP 3"
					
850008	850009	850036	850021	850003	850004
					
850020	850013	850039	850022	850005	850006
					
850020	850013	850039	850025	850026	850027
					
850024	850024	850024	850024	850037	850037
				M28X1,5	M28X1,5
				DIN 11851	DIN 11851
				DN 10	DN 10

